


FUEL FILTER KIT

IMPORTANT: This document guides our dealers, boatbuilders, and company service personnel in the proper installation or service of our products. If you have not been trained in the recommended servicing or installation procedures for these or similar Mercury Marine products, have the work performed by an authorized Mercury Marine dealer technician. Improper installation or servicing of the Mercury product could result in damage to the product or personal injury to those installing or operating the product. Always refer to the appropriate Mercury Marine service manual for component removal and installation instructions.

NOTE: After completing installation, place these instructions with the product for the owner's future use.

Models Covered
30-60 EFI FourStroke engines

Components Contained in Fuel Filter Kit

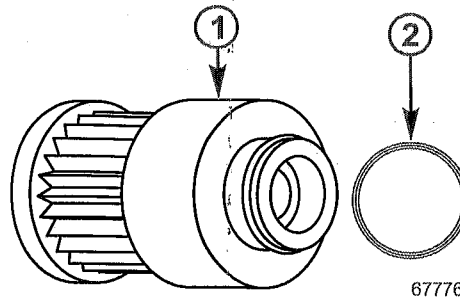


Ref No.	Qty.	Description	Part Number
1	1	Fuel filter	NSS
2	1	O-ring	NSS

Fuel Filter Installation


IMPORTANT: Refer to the appropriate service manual for complete disassembly and assembly procedures.

1. Remove the fuel filter bowl from the fuel filter assembly.
2. Remove the old fuel filter and O-ring from the fuel filter assembly.



- a - Fuel filter assembly
- b - Fuel filter bowl


3. Lightly lubricate the new O-ring with fuel and install the new O-ring on the new fuel filter.
4. Install the new fuel filter and O-ring on the fuel filter assembly.

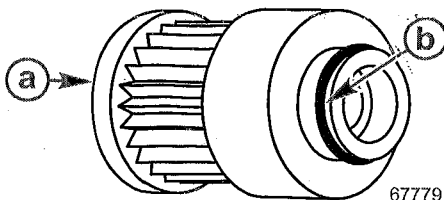

- a - Fuel filter
- b - O-ring

FUEL FILTER KIT

5. Install the fuel filter bowl on the fuel filter assembly.



- a - Fuel filter assembly
b - Fuel filter bowl

6. Tighten the fuel filter bowl to the specified torque.

Description	Nm	lb-in.	lb-ft
Fuel filter bowl	2.5	22.1	-